

Fanless Slim PC with Celeron processor for numerous applications

D 4370XA is an engineering marvel of integration redesigned in an ultra-small form factor. It is a fanless Slim PC packed into a robust 1.3 litre metal chassis with exceptional connectivity: HDMI, DVI, Dual Gigabit LAN, USB 3.0/2.0, serial ports, audio and card reader. The D 4370XA also comes with a built-in Wireless LAN and Dual Core Celeron processor with integrated HD graphics capable of playing 1080p Full HD video flawlessly. Thanks to its redesigned passive cooling architecture and SSD drive, the system is virtually noiseless and maintenance-free and has been approved for 24/7 nonstop operation. It is big on performance yet extremely energy-efficient, consuming only 11 Watts in idle mode. D 4370XA closes the gap between lower-performance Atom solutions and high-performance desktop PCs. It is an ideal platform for professional applications such as digital signage, POS, Kiosk, Thin Client, Cloud Computing, Office PC and Multimedia.

**1.3L Slim PC
D 4370XA**
Fix configuration without OS



Feature Highlights

Slim Design	<ul style="list-style-type: none"> • Slim 1.3 litre metal chassis, black • Dimensions: 20 x 16.5 x 3.95 cm (LWH) • Incl. Stand & VESA mount (75/100 mm)
Operating system	<ul style="list-style-type: none"> • System come without operating system • Compatible with Windows XP/7/8, Linux
Processor	<ul style="list-style-type: none"> • Intel Celeron 1037U, Dual Core, 1.8 GHz • Integrated Intel HD graphics • Fanless heat-pipe cooling
Memory	<ul style="list-style-type: none"> • 4 GB DDR3 SO-DIMM memory
Storage	<ul style="list-style-type: none"> • 60 GB SSD drive (6.35cm/2.5", SATA) • mSATA/SSD module supported
Connectors	<ul style="list-style-type: none"> • HDMI 1.3, DVI-I • 2x USB 3.0 rear, 4x USB 2.0 front • SD card reader , 2x Audio (Line out + mic) • Dual Gigabit LAN (RJ45), WLAN 802.11n • 2x COM ports (RS232 + RS232/RS422/RS485) • Connector for external power button
Power Supply	<ul style="list-style-type: none"> • External 65 W fanless power adapter
Applications	<ul style="list-style-type: none"> • Digital Signage, POS, control device, etc. • Approved for 24/7 permanent operation



EAN code: 4046047102792
Shuttle Order-No. PIC-DS43701
Images are for illustration purposes only.

Shuttle Slim-PC D 4370XA – Product Features



Robust, Stylish and Extremely Small

You should have held it in your own hands to appreciate how small it actually is. Barely 1.35 litre in volume, its rigid steel chassis design exudes the level of quality and stability that is required for professional digital signage applications. Despite its diminutive size, the processing power inside the D 4370XA is sufficient to meet the needs of the most demanding multimedia and computational workloads. The well-designed interior of the D 4370XA makes installations and upgrades effortless. Its sleek and stylish look blends seamlessly in both home and office environments.



Ease of installation thanks to bay covers

D 4370XA features two practical bay covers at the bottom of the chassis which makes the upgrade of hardware components a breeze.



Intel Core Processor Architecture

The Shuttle Slim PC DS437 is equipped with an Intel® Celeron™ 1037U processor which is soldered to mainboard and passively cooled by a large heat-sink. Although the Thermal Design Power (TDP) is 17 watts, the average heat dissipation is much lower. The processor belongs to Intel's third-generation Intel Core processor family (Codename: "Ivy Bridge") with which performance and architecture is fundamentally superior to Atom D2700/D2550 processors. The Celeron 1037U is originally intended for mobile solutions and features 2 MB Cache, dual channel memory interface and a powerful Intel HD graphics chip. It is capable of decoding Full HD video with driver support for all major operation systems including Windows XP, 7, 8 and Linux.

© 2014 by Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purposes only.



No fan noise

A large heat sink is concealed behind a plastic cover and cools down the processor in a passive way without any fan. Using an SSD drive instead of a hard disk makes the system virtually noiseless and hence perfectly suitable for noise-sensitive environments like e.g. bedroom, library, living room, music studio etc.



Energy-saving

Power consumption mainly depends on system load. Equipped with a 2.5" hard disk, the system consumes about 11W in idle mode and max. 30W under full load. Running the device 5 days a week for eight hours a day, the annual consumption would amount to less than 23 kWh which would mean just 6 Euros on the power bill (25 Euro ct/kWh) - way less than a conventional desktop PC draws.



Great Connectivity

Despite its small size, D 4370XA sports a wide range of I/O connectors. Besides an SD card reader, it sports a couple of USB 3.0, USB 2.0, Gigabit-LAN, digital video, audio and serial ports.




Dual View Technology with HDMI and DVI

D 4370XA features two digital video outputs: HDMI and DVI-I. Dual View technology offers multiple display support on up to two separate monitors. This helps to improve on productivity by allowing for spreading multiple windows across two monitors while working with them simultaneously.



Dual Gigabit LAN Network

Today's media-rich communications across the internet and within enterprises create new demands for clients in Local Area Networks. For that reason, Shuttle applies Gigabit LAN performance to their Mini-PCs and D 4370XA even supports two of them. Dual networking allows the computer to connect to a single network using two cables at once with an appropriate switch (teaming mode with load balancing or failover function) or to two different networks depending on the needs of the user.



Video outputs

With optional adapters DVI-D devices can be connected to the HDMI port or VGA devices to the DVI-I port, respectively.

DVI-D means the connector only outputs digital video signals.

DVI-I means digital and analog video signals are put out.

HDMI supports digital video plus multi-channel digital audio output.

D-Sub / VGA means analog video signals are put out.



RS-232 RS-422 RS-485

Two serial ports

Many PCs do not have these legacy ports any longer, since they have been superseded and replaced by USB for most consumer applications, but they are still commonly used for applications such as industrial automation systems, scientific analysis, POS systems and other industrial applications. D 4370XA features two serial RS-232 ports which also support both 5 and 12V auxiliary voltage. The left COM port (COM1) also supports the RS422 and RS485 standard. The COM ports are protected by black plastic caps.



COM port Pin 9 Configuration

Pin 9 of the COM-Port is a multi-functional signal (see red circle on the photo). Based on Jumper JP2 configuration on the mainboard, it can be configured as Ring Indicator (RI) or external power supply with either 5V or 12V voltage level (each COM port separately).



Expansion slots for Mini-PCI-Express cards

D 4370XA features two Mini PCI Express expansion slots which can easily be accessed by removing the appropriate bay cover. One slot supports half size cards and is already occupied with a WLAN card. The other slot also supports full size cards and can be used either for a Mini PCIe card or for a mSATA (Mini Serial ATA) card, which is a Solid State Drive (SSD) in a compact Mini PCIe card form factor.




VESA mount

The supplied 75/100mm VESA mount allows D 4370XA to be installed on to walls or just to be affixed on the rear side of a monitor which is particularly interesting for the industry segment, company buildings and public institutions. Besides this, the chassis of D 4370XA provides numerous threaded holes (M3) enabling it to be fitted almost anywhere.



SD Card Reader


The built-in SD card reader at the front side makes it easy to transfer files from your camera so you can share videos and photos on your D 4370XA with ease. It supports SD, SDHC and SDXC memory flash cards in standard size format also supports boot up from bootable SD cards.

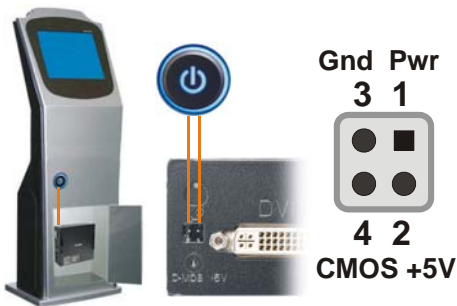

External power button by separate remote line

If because of space constraints (e.g. in the case of a fixed installation) the machine cannot be switched on by pressing the front power button, it can be powered on by a separate remote line. You will find an appropriate four-pin-connector at the back panel of D 4370XA (pitch 2.54 mm). In addition, this connector also provides the Clear CMOS function and an external 5VDC voltage supply.

Pin 1-3	Connect external power button (use a temporary switch)
Pin 3-4	Close these pins for 3 seconds to perform a Clear CMOS
Pin 2-3	External +5V DC voltage (Pin 3 = Ground).

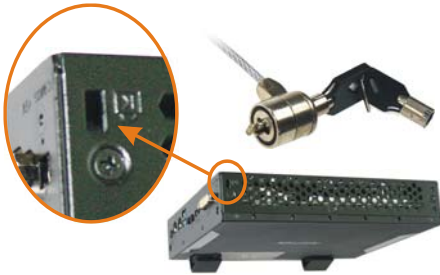

Kensington Lock

This is a small, metal-reinforced hole as part of an anti-theft system. D 4370XA provides an appropriate hole on both side of its chassis. The lock-and-cable is not included.



Location of Jumper J1

Power on after Power fail

The BIOS setup provides a "Power-On after Power Fail" function that can be found under "Power Management Configuration". As the name indicates, this function determines the PC's behaviour after power failure: (1) unconditional power on, (2) restore former status or (3) keep system turned off. As a matter of the nature of this function, it may fail after short power failures. This is why the DS437 also comes with a hardware-based solution. By removing Jumper J1 (see quick guide) the system will start unconditionally once power is applied.



24/7 nonstop operation

Shuttle D 4370XA is officially approved for 24/7 permanent operation. Thanks to its low power consumption and completely passive cooling, this PC runs highly reliable making it perfectly suitable for digital signage and POI/POS applications.

Conditions for permanent use:

- Free circulation of air amongst the PC must be guaranteed
- Ventilation holes must stay clear




Operating Position


The passive cooling system of D 4370XA uses the convective heat-transfer principle, which requires observing the correct operation position of the device. Please follow these instructions in order to obtain the best possible cooling effect:

- 1) Device must only be used in vertical position with the DVI port facing up
- 2) Please make sure to use either the supplied feet or the VESA mount

Shuttle D 4370XA – Product Views

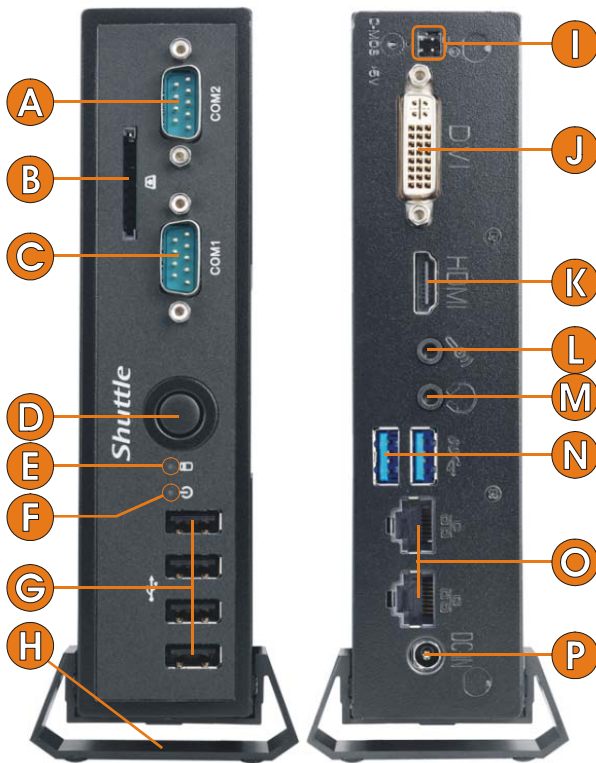

- A COM2: RS-232
- B SD card reader
- C COM1: RS-232/422/485
- D On/Off power button
- E Hard disk LED indicator
- F Power LED indicator
- G 4x USB 2.0
- H Stand
- I Pin connector for external power or CMOS button or 5V DC voltage supply
- J DVI-I Video Port
- K HDMI Video Port
- L Microphone input
- M Head phone output
- N 2x USB 3.0
- O 2x RJ45 Gigabit LAN
- P DC connector for external power adapter
- Q Hole for the Kensington lock
- R Ventilation holes
- S Bay for 2.5" storage (HDD or SSD) *
- T Slot for Mini PCIe card or mSATA module (full size or half size) *
- U Slot for half size WLAN module *
- V 2x SO-DIMM slot for DDR3 memory modules *

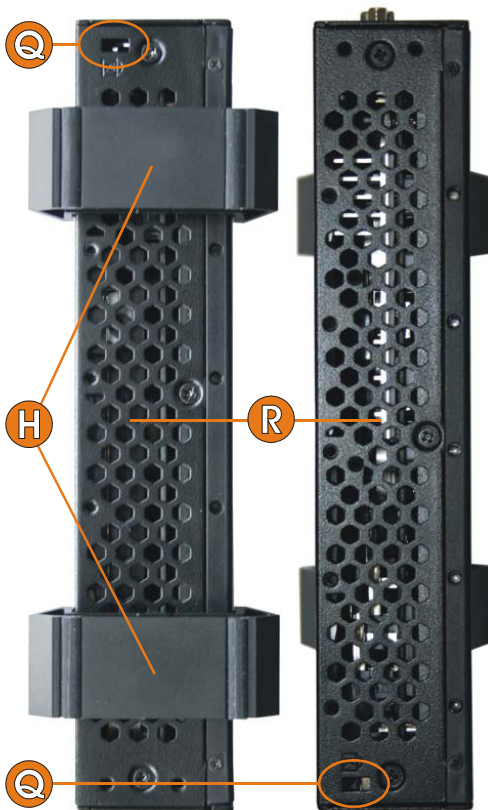

*) The scope of delivery includes a 2.5" SSD storage, one or two SO-DIMM memory modules and a WLAN module. The mSATA module is not included. The images are for illustration purposes only.

Shuttle D 4370XA Specifications

<i>Fanless and silent</i>	<p>Passive cooling, no fan noise at all Perfect to be used in noise-sensitive environments Fanless, dust-free and thus virtually maintenance-free</p>
<i>Low power consumption</i>	<p>Power consumption: idle: 10-11W, full load: 22-30W (without/with graphics) (measured with 2x 2GB SO-DIMM, 500 GB 2.5" hard disk)</p>
<i>24/7 nonstop operation</i>	<p>This device is approved for 24/7 permanent operation. Requirements: - Free circulation of air amongst the PC must be guaranteed. - Ventilation holes must stay clear.</p>
<i>Chassis</i>	<p>Slim-PC (Nettop) with black chassis made of steel Without cooling fan, passive cooling only The bays for memory, 2.5" drives and Mini-PCIe cards can be easily accessed by removing two cover plates. Dimensions: 200 x 165 x 39.5 mm (LWH) = 1.3 litres Weight: 1.43 kg net and 2.13 kg gross Two holes for Kensington Lock and numerous threaded holes (M3) at both sides of the chassis</p>
<i>Operation position</i>	<p>Operation Position: 1) Device must only be used in vertical position with the DVI port facing up 2) Please make sure to use either the supplied feet or the VESA mount</p>
<i>Operation System</i>	<p>This system comes without operating system. It is compatible with Windows 8, Windows 7, Windows XP and Linux Supports 32 and 64 bit.</p>
<i>Processor</i>	<p>Model: Intel Celeron 1037U (ULV) Code name: Ivy Bridge (3rd Gen. Core) Cores / Threads: 2 / 2 Clock rate: 1.8 GHz L1/L2/L3 cache: 128 kB / 512 kB / 2048 kB Memory controller: DDR3-1333/1600 Dual Channel TDP wattage: 17 W maximum Manufacturing process: 22 nm Socket: FCBGA1023 Enhanced SpeedStep technology Maximum Tjunction Temperature: 105°C Integrated Intel HD graphics engine Supports 64 Bit, VT-x with EPT, Enhanced SpeedStep, NX bit, SSE4</p>
<i>Storage</i>	<p>60 GB Solid State Disk (SSD) 6.35cm / 2.5" form factor, SATA interface</p>

© 2014 by Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purposes only.

<p><i>Memory</i></p>	<p>4 GB DDR3 SO-DIMM memory Maximum total size of 16 GB</p>
<p><i>Integrated graphics</i></p>	<p>Intel HD graphics Clock rate: 350~1000 MHz Maximum resolution: 1920x1200 (analog or digital) Execution Units (EU): 6 Supports two independent screens Supports DirectX 11.1, OpenGL 4.0 Supports full AVC/VC1/MPEG2 hardware decoding HDMI supports HD video plus multi-channel digital audio via a single cable</p>
<p><i>Mainboard Chipset BIOS</i></p>	<p>Shuttle Mainboard FS47 All capacitors are high quality solid capacitors Chipset: Intel® NM70 Express Supports resume after power failure Supports Wake on LAN (WOL) Supports Power on by RTC Alarm Supports boot from USB devices and SD card reader AMI BIOS in 8 Mbit EEPROM with SPI interface Supports hardware monitoring and watch dog functionality Supports Unified Extensible Firmware Interface (UEFI) [1]</p>
<p><i>Power Adapter</i></p>	<p>External 65 W power adapter (fanless) Input: 100~240 V AC, 50/60 Hz, max. 1.6 A Output: 19 V DC, max. 3.42 A, max. 65 W DC Connector: 5.5/2.5mm (outer/inner diameter)</p>
<p><i>Mini-PCIe slots</i></p>	<p>Two Mini PCI Express expansion slots: full size and half size 1) the half size slot is occupied with a WLAN module 2) the full size slot supports PCIe 2.0, SATA 3G and USB 2.0 and can either be used for a Mini-PCIe card or for a Mini SATA (mSATA) flash memory card [3] Please use the "Mini-PCIE / mSATA Select" function in the BIOS setup.</p>
<p><i>Audio</i></p>	<p>Audio Realtek® ALC 662 High-Definition Audio (5.1 channel) Two analog audio connectors (3.5mm) at the back panel: 1) 2 channel line out (head phone) 2) microphone input Digital multi-channel audio output: via HDMI</p>
<p><i>Dual Gigabit LAN Controller</i></p>	<p>Dual Realtek 8111G Ethernet network controller (Gigabit) Supports 10 / 100 / 1.000 MBit/s operation With two RJ45 ports (dual network) supports Teaming [2] Supports WAKE ON LAN (WOL) Supports network boot by Preboot eXecution Environment (PXE)</p>
<p><i>Wireless Network (WLAN)</i></p>	<p>Built-in Mini-PCIe WLAN card (half size) and internal antenna Supports IEEE 802.11b/g/n, max. 150Mbps up-/downstream Security: WPA/WPA2(-PSK), WEP 64/128bit, IEEE 802.11x/i</p>

© 2014 by Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purposes only.

<p><i>Card reader</i></p>	<p>Integrated USB card reader Supports SD, SDHC and SDXC memory flash cards Supports boot up from SD card</p>
<p><i>Front Panel Connectors</i></p>	<p>4x USB 2.0 2x RS232 serial ports (5V/12V, 1x switchable to RS422 / RS485) with black plastic caps SD card reader (supports SD, SDHC, SDXC) Power button Power LED (blue) HDD LED (yellow)</p>
<p><i>Back Panel Connectors</i></p>	<p>HDMI 1.3 connector (supports DVI-D with optional adapter) DVI-I connector (supports VGA with optional adapter) 2x USB 3.0 2x Gigabit LAN (RJ45) Microphone input Audio Line-out (headphone) DC-input connector for external power adapter 4 pin connector (2.54 mm pitch) for power button, Clear CMOS and 5V DC [4] Perforation for optional Wireless LAN antennas (2 holes)</p>
<p><i>Other Onboard Connectors</i></p>	<p>Connector for CMOS battery (with battery) Fan connector (4 pins) not occupied</p>
<p><i>Scope of delivery</i></p>	<p>Two metal feet VESA mount for 75/100mm standard (two metal brackets) Four thumbscrews M3 x 5 mm (screws together VESA mount and PC) Four screws M4 x 10 mm (to fix the VESA mount to the external device) Three screws M3 x 4 mm and a rack (to mount a 2.5" storage into the bay) Driver DVD (Windows 8 / 7 / XP) External power adapter with power cord</p>
<p><i>Environmental Specifications</i></p>	<p>Operating temperature range: 0~40 °C [5] Relative humidity, non-condensing: 10~90%</p>
<p><i>Conformity Certifications</i></p>	<p>EMI: FCC, CE, BSMI, C-Tick Safety: CB, BSMI, ETL, CCC This device is classed as a technical information equipment (ITE) in class B and is intended for use in living room and office. The CE-mark approves the conformity by the EU-guidelines: - EMV-guideline 89/336/EWG electromagnetic tolerance - LVD-guideline 73/23/EWG use of electric devices within certain voltage-limits</p>

© 2014 by Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purposes only.

Footnote:

[1] **Unified Extensible Firmware Interface (UEFI)** - required when booting from hard disks larger than 2.2 TB

[2] **Teaming Mode**

The teaming function allows you to group both available network adapters together to function as a single adapter - a method of creating a virtual LAN. The benefit of this approach is that it enables load balancing and failover.

[3] **mini-SATA (mSATA)**

not to be confused with the "micro SATA" connector, is a newer industry standard which converts the electrical SATA interface (1.5 or 3.0 Gbit/s) to the physical "Mini PCI Express" mini card form factor.

[4] **Four pin header at the back panel**

This header allows for connecting an external power button.

It also provides 5V DC voltage for external devices and the Clear CMOS function.

[5] **Caution:** for high ambient temperature of 35°~40°C we strongly recommend to use SSDs (supporting at least 70°C).

Supplied accessory: VESA mount with screws



SKUs of the DS437 series:

	Type	UPC / EAN code	Order No.	Operation System	Storage	RAM
DS437	Barebone	811686006459	PIB-DS43701	-	-	-
D 4370XA	System w/o OS	4046047102792	PIC-DS43701	-	60 GB SSD	4 GB
D 4370BA	System with OS	4046047102785	PIT-D0437BA1	Windows 7 Pro 64 Bit	60 GB SSD	4 GB