

## SYSTEM XPC slim DA320P

### ROBUST 1.3-L SLIM PC WITH AMD RYZEN 5 PROCESSOR

The Shuttle XPC slim System DA320P is based on the Shuttle Barebone DA320 and is a robust 1.35-litre PC with AMD Athlon Ryzen 5 3400G and Windows 10. It allows for up to three\* Ultra HD displays to be operated at the same time via HDMI 2.0 and DisplayPort and offers dual Gigabit-LAN, eight USB ports and two COM ports. Its slim metal chassis comes with a VESA mount included, provides versatile connectivity and reliable operation in environments with ambient temperatures of up to 50 °C. It is targeted at professional applications such as Digital Signage, POS, POI, gambling machines, office, healthcare and industry.



#### SLIM DESIGN

■ Slim 1.35-litre metal chassis, black ■ Dimensions: 190 x 165 x 43 mm (LWH) ■ Including VESA mount (75/100 mm) ■ Supports 24/7 Nonstop Operation ■ Operating temperature: 0~50 °C (non-condensing)

#### OPERATING SYSTEM

■ Windows 10 IoT Enterprise 2019 LTSC (64-bit)

#### PROCESSOR

■ AMD Ryzen 5 3400G, Socket AM4, 12 nm, 4 Cores, 8 Threads, 3.7 GHz, 4.2 GHz Turbo ■ Heatpipe cooling system

#### GRAPHICS

■ Integrated Radeon Vega 11 graphics with 704 Shaders ■ Supports up to three independent UHD displays

#### CHIPSET

■ AMD A320 Chipset

#### MEMORY SUPPORT

■ 8 GB DDR4 SO-DIMM memory ■ max. 2x 16 GB

#### STORAGE - SATA / M.2

■ 250 GB SSD (2.5" SATA) ■ 1x M.2-2280M slot (supports PCIe x4 NVMe or SATA) ■ 1x M.2-2230E for optional WLAN (WLN-M)

#### CONNECTORS

■ HDMI 2.0a ■ 2x DisplayPort 1.2 ■ optional VGA ■ SD card reader ■ 2x audio (line out, mic) ■ 6x USB 3.2 Gen1 ■ 2x USB 2.0 ■ 2x Gigabit LAN (RJ45) ■ 2x RS232 COM port ■ Connector for external power button ■ "Always on" Jumper

#### POWER SUPPLY

■ External 120W/19V power adapter

#### OPTIONAL ACCESSORIES

■ WLAN Module (WLN-M) ■ Vertical Stand (PS02) ■ VGA Port (PVG01) ■ Rackmount kit (PRM01) ■ Cable for external power button (CXP01) ■ DIN-Rail mounting kit (DIR01) ■ LTE-kit (WWN03)



#### MODELS BASED ON THE DA320 BAREBONE:

Product	Type	Processor	Storage	RAM	OS	Bar Code
DA320	Barebone	—	—	—	—	UPC: 887993002767
DA3200XA	System	AMD Ryzen 5 3400G	250 GB SSD (2.5", SATA)	8 GB DDR4	—	EAN: 4046047103614
DA320P	System	AMD Ryzen 5 3400G	250 GB SSD (2.5", SATA)	8 GB DDR4	Windows 10 IoT	EAN: 4046047103607

## PRODUCT FEATURES



### Robust, stylish and particularly small

You should have held it in your own hands to see how small it actually is. At barely a volume of 1.35 litres, its steel chassis gives it the appropriate stability required for professional applications such as digital signage. Despite its dimensions of 19 x 16.5 x 4.3 cm (LWH), the overall system performance is very high thanks to the AMD Ryzen 5 desktop processors.




### Dual Gigabit LAN Network

This PC supports Dual Gigabit LAN with Realtek network adapters, offering excellent performance and driver compatibility.




### VESA mount

The supplied 75/100mm VESA mount allows for installation on to walls or monitors which is particularly interesting for the industry segment, company buildings and public institutions. Other than this, the chassis bears numerous threaded holes (M3) enabling it to be fitted almost anywhere.



### Low noise thanks to heatpipe cooling system

An active dual-fan heatpipe cooling system ensures whisper-quiet operation and system stability.



### Power on after Power fail

The BIOS setup provides a "Power-On after Power Fail" function that can be found under "Power Management Configuration". As the name indicates, this function determines the PC's behaviour after power failure: (1) unconditional power on, (2) restore former status (3) keep system turned off (4) Power-On by LAN or (5) Power-On by Real-Time-Clock. As a matter of the nature of this function, it may fail after short power failures. This is why this PC also comes with a hardware-based solution. By removing Jumper JP3, the system will start unconditionally once power is applied.



### Extended temperature range and 24/7 operation

This product is officially approved for 24/7 permanent operation. Thanks to its efficient cooling, this PC runs highly reliably making it perfectly suitable for digital signage and POI/POS applications - even at ambient temperatures of up to 50 °C (non-condensing).



### Triple 4K Display support

This product features three digital video outputs: one HDMI 2.0 and 2x DisplayPort (DP 1.2) which all can run at 4K (3840 x 2160 / 2160p) high resolution at 60 Hz frames per second.



### External power button by separate remote line

If, because of space constraints (e.g. in case of a fixed installation), the machine cannot be switched on by pressing the front power button, it can be powered on by a separate remote line. You will find an appropriate four-pin connector on the back panel (pitch 2.54 mm). Furthermore, this connector provides a Clear CMOS function and +5V DC voltage supply for external devices.

+5V voltage (2) (4) Power Button  
Clear CMOS (1) (3) Ground

Unigine Benchmark Graphics Performance	
AMD Ryzen 5 3400G Rad. Vega11 Graphics	<b>2304</b>
Intel Core-i5 10400 UHD 630 Graphics	<b>832</b>

Config: 32GB RAM, M.2 SSD, Windows 10

### High Graphics Performance

The integrated Vega 11 graphics in an AMD Ryzen 5 3400G processor is one of the fastest GPUs in a desktop processor. This allows mid-range gaming with FullHD and also professional applications with three UHD displays like digital signage.

### OPTIONAL ACCESSORIES FROM SHUTTLE



#### VGA port adapter **PVG01**

Installing PVG01 means one serial port (COM) less can be used on the backpanel.



#### WLAN-Accessory **WLN-M**

The M.2-2230 card supports IEEE 802.11 b/g/n/ac and includes two external antennas.



#### LTE Adapter Kit **WWN03**

allows the installation of an M.2 LTE card and nano SIM card (occupies the 2.5" bay).



#### Cable **CXP01**

Cable for external push button switch (without button)



#### Vertical Stand **PS02**

for vertical operation



#### DIN-Rail Kit **DIR01**

This mounting kit allows the installation on a standard 35 mm DIN-Rail.



#### Rack Mount Kit **PRM01**


2U front plate to install two 1.3L Shuttle XPCs in a 19" cabinet.

## Front and Back Panel


Front panel



Back panel

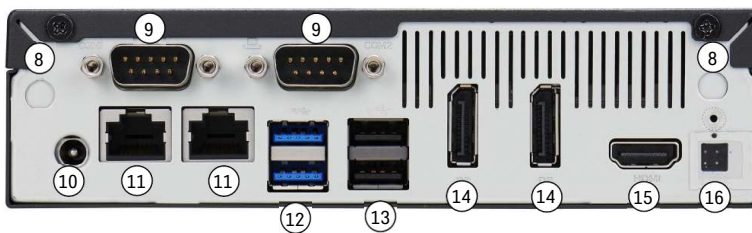

Right side

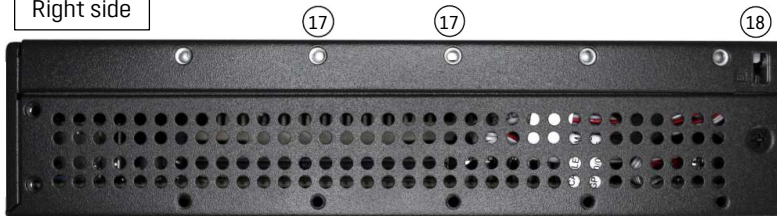

Left side



1. Microphone input
2. Headphones output
3. LED indicator for power state
4. LED indicator for storage activity
5. Power button
6. SD card reader
7. 4x USB 3.2 Gen 1 port
8. 2x WLAN perforation
9. 2x COM port supports RS232
10. DC-in connector for power adapter
11. 2x RJ45 Gigabit LAN port
12. 2x USB 3.2 Gen 1 port
13. 2x USB 2.0 port
14. 2x DisplayPort 1.2
15. HDMI 2.0 port
16. 4-pin connector (2.54 mm pitch) for external power button, Clear CMOS button and 5V DC voltage

17. Threaded holes (M3)
18. 2x hole for Kensington Lock



19. VESA mount (two parts)

## SHUTTLE XPC SLIM SYSTEM DA320P – SPECIFICATIONS

<b>CHASSIS</b>	<p>Slim PC with black chassis made of metal</p> <p>Dimensions: 190 x 165 x 43 mm (LWH) = 1.35-litre</p> <p>Weight: 1.13 kg net and 2.3 kg gross</p> <p>Two holes for Kensington Locks and numerous threaded holes (M3) on both sides of the chassis</p>
<b>POWER ADAPTER</b>	<p>External 120 W power adapter (fanless)</p> <p>Input: 100~240 V AC, 50/60 Hz</p> <p>Output: 19 V DC, max. 6.32 A, max. 120 W</p> <p>DC Connector: 5.5 / 2.5 mm (outer/inner diameter)</p> <p>AC mains cable: 3 pins, ca. 1.8 m length, with C5/C6 coupler (called "Mickey Mouse" or "Clover-leaf") for the power adapter and CEE-7/7 plug with earth-contact (type E+F) for the power outlet</p> <p>Dimensions: 150 x 65 x 36 mm (LWH)</p>
<b>OPERATING SYSTEM</b>	Windows 10 IoT Enterprise 2019 LTSC (64-bit)
<b>PROCESSOR</b>	<p>AMD Ryzen 5 3400G processor</p> <p>Code name: Picasso / Zen+</p> <p>Socket AM4</p> <p>Clock frequency: 3.7 GHz (4.2 GHz Turbo)</p> <p>4 Cores, 8 Threads</p> <p>L2 cache: 2 MB</p> <p>L3 cache: 4 MB</p> <p>Integrated graphics: Radeon Vega 11</p> <p>Power consumption: max. 65 W</p> <p>Manufacturing process: 12 nm</p>
<b>PROCESSOR COOLING</b>	Heatpipe processor cooling with two 60 mm fans on the upper side of the chassis
<b>MAINBOARD / CHIPSET</b>	<p>Mainboard in a Shuttle form factor proprietary design</p> <p>Chipset: AMD A320</p>
<b>BIOS</b>	<p>AMI BIOS, SPI Interface, 16 MB Flash-EPROOM</p> <p>Supports Hardware Monitoring and watch dog functionality</p> <p>Supports Firmware-TPM (fTPM) v2.0</p> <p>Supports boot up from external USB flash memory</p> <p>Supports Unified Extensible Firmware Interface (UEFI)</p> <p>Supports power on after power failure</p>
<b>RAM MEMORY</b>	<p>8 GB DDR4 SO-DIMM memory</p> <p>Supports a maximum of 16 GB per DIMM, maximum total size: 32 GB</p>
<b>INTEGRATED GRAPHICS</b>	<p>AMD Radeon Vega 11</p> <p>Shader: 704</p> <p>Max. GPU clock frequency: 1400 MHz</p> <p>The PC features three digital video outputs which support 1080p/60 and 2160p/60:</p> <ul style="list-style-type: none"> <li>- 1x HDMI v2.0</li> <li>- 2x DisplayPort v1.2</li> </ul> <p>Supports displays with 4K Ultra HD resolution at 3840 x 2160</p> <p>Supports three independent displays with the integrated graphics function</p> <p>DisplayPort and HDMI support multi-channel digital audio over the same cable.</p> <p>Optional analog D-Sub/VGA video output [1]</p>
<b>SSD DRIVE (2.5")</b>	250 GB SSD with SATA interface in 2.5" form factor
<b>M.2-2280M SSD SLOT</b>	<p>The M.2-2280M slot provides the following interfaces:</p> <ul style="list-style-type: none"> <li>- PCI-Express Gen. 3 X4, supports NVMe</li> <li>- SATA v3.0 (max. 6 Gbps)</li> </ul> <p>It supports M.2 cards with a width of 22 mm and a length of 42, 60 or 80 mm (type 2242, 2260, 2280).</p> <p>Supports the following M.2 SSDs: type SATA with B+M key and type PCI-Express/NVMe with M key.</p>
<b>M.2-2230E SLOT FOR WLAN CARDS</b>	<p>Interfaces: PCI-Express Gen. 3.0 X1 und USB 2.0</p> <p>Supports M.2 cards with a width of 22 mm and a length of 30 mm (type 2230)</p> <p>Supports WLAN expansion cards (optional Shuttle accessory: WLN-M)</p>

AUDIO	<p>Audio Realtek® ALC 662 5.1 channel High-Definition Audio</p> <p>Two analog audio connectors (3.5mm) on the front panel:</p> <ol style="list-style-type: none"> <li>1) 2-channel line-out (head-phones)</li> <li>2) microphone input</li> </ol> <p>Digital multi-channel audio output: by HDMI and DisplayPort</p>
DUAL GIGABIT LAN CONTROLLER	<p>Dual network with two RJ45 ports with two status LEDs each</p> <p>Used network chips:</p> <p>2x Realtek RTL8111H Ethernet Controller (MAC, PHY)</p> <p>PCIe interface</p> <p>Supports 10 / 100 / 1.000 MBit/s operation</p> <p>Supports WAKE ON LAN (WOL)</p> <p>Supports network boot by Preboot eXecution Environment (PXE)</p> <p>Supports Teaming mode [4]</p>
CARD READER	<p>Integrated card reader</p> <p>Supports SD, SDHC and SDXC up to v3.01 memory flash cards</p> <p>UHS-I interface supports up to 104 MB/s (SDR104) transfer speed</p> <p>Realtek RTS5227S chip with PCIe chipset interface</p> <p>Supports boot up from SD card.</p>
FRONT PANEL CONNECTORS	<p>Microphone input</p> <p>Audio Line-out (headphones)</p> <p>4x USB 3.2 Gen 1 (max. 5 Gbps)</p> <p>SD card reader</p> <p>Power button</p> <p>Power LED (blue)</p> <p>HDD LED (yellow)</p>
BACK PANEL CONNECTORS	<p>1x HDMI 2.0 connector</p> <p>2x DisplayPort 1.2 connector (DP)</p> <p>Optional: 1x D-Sub VGA connector (Accessory PVG01 [1])</p> <p>2x USB 3.2 Gen 1 (max. 5 Gbps)</p> <p>2x USB 2.0</p> <p>2x Gigabit LAN (RJ45) [4]</p> <p>2x RS232 serial COM port, 9-pin D-Sub</p> <p>1x DC-input connector for external power adapter</p> <p>1x 4-pin connector (2.54 mm pitch) supports:</p> <ul style="list-style-type: none"> <li>- external power on button</li> <li>- Clear CMOS function</li> <li>- +5V DC voltage for external components</li> </ul> <p>2x perforation for optional Wireless LAN antennas</p> <p>2x hole for Kensington Lock</p>
OTHER ONBOARD CONNECTORS	<p>1x jumper for power-on-after-power-fail (hardware solution) [3]</p> <p>1x analog VGA graphics output CN3 (2x 10-pin, 1 mm pitch) [1]</p> <p>2x serial interface (COM) occupied by back panel connectors</p> <p>1x USB 2.0 (4-pin) for optional accessory WWN03 (LTE kit)</p> <p>1x fan connector (4-pin) occupied by the cooling system</p> <p>1x Debug header (reserved)</p>
SUPPLIED ACCESSORIES	<p>Multi-language user guide (EN, DE, FR, ES, JP, KR, SC, TC)</p> <p>VESA mount for 75/100 mm standard (two metal brackets)</p> <p>Four screws M3 x 5 mm (screws together VESA mount and PC)</p> <p>Four screws M4 x 10 mm (to affix VESA mount on the PC)</p> <p>Four screws M3 x 4 mm (to mount a 2.5" storage device into the bay)</p> <p>Two screws M3 x 5 mm (silver colour, to mount two M.2 cards)</p> <p>Driver DVD (Windows 64-bit)</p> <p>External 120 W power adapter with power cord</p>
OPTIONAL ACCESSORIES	<p><b>PVG01:</b> optional D-Sub VGA video output [1]</p> <p><b>WLN-M:</b> WLAN module in M.2-2230 format supports IEEE 802.11ac and Bluetooth 4.0 with two external antennas.</p> <p><b>WWN03:</b> LTE adapter kit with antennas, but without LTE card [2]</p> <p><b>PS02:</b> Stand for vertical operation</p> <p><b>CXP01:</b> adapter cable for external power button</p> <p><b>PRM01:</b> 2U rack mount front plate for two Shuttle XPC slim PCs</p> <p><b>DIR01:</b> DIN-Rail mounting kit</p>

<b>ENVIRONMENTAL SPECIFICATIONS</b>	Operating temperature range: 0~50 °C Relative humidity, non-condensing: 10~90 %
<b>CERTIFICATIONS / COMPLIANCE</b>	EMI: FCC, CE, BSMI, RCM, VCCI Safety: ETL, CB, BSMI Other: RoHS, Energy Star, ErP
<b>CONFORMITY</b>	This device is classed as a technical information equipment (ITE) in class B and is intended for use in living room and office. The CE-mark approves the conformity by the EU directives: (1) 2004/108/EC relating to electromagnetic compatibility (EMC), (2) 2006/95/EC relating to Electrical Equipment designed for use within certain voltage limits (LVD), (3) 2009/125/EC relating to ecodesign requirements for energy-related products (ErP)

#### [1] Optional D-Sub/VGA connector

The mainboard features one analog graphics port CN3 on the mainboard. This signal can be lead to the outside as a 15-pin D-Sub VGA connector on the backpanel by using the optional adapter PVG01. You have to open Jumper JP11 then. However doing so means two ports less can be used on the backpanel: one serial port (COM) connector will be replaced by the VGA port and the right DisplayPort will be disabled.

#### [2] Optional Accessory WWN03 (LTE kit)

The Shuttle XPC accessory WWN03 allows this PC to be upgraded with an LTE/4G function for mobile network. The LTE card will occupy the 2.5" bay, so you will have to use an M.2 SSD as a mass storage device. The required LTE/4G card in M.2-3042 format and an activated Nano SIM card are not included in the scope of delivery.

#### [3] Power on after power fail

The BIOS setup provides a "Power-On after Power Fail" function that can be found under "Power Management Configuration". As the name indicates, this function determines the PC's behaviour after power failure: (1) unconditional power on, (2) restore former status or (3) keep system turned off. As a matter of the nature of this function, it may fail after short power failures. This is why this PC also comes with a hardware-based solution. By removing Jumper JP3 (on the mainboard behind the power button) the system will start unconditionally once power is supplied.

#### [4] Teaming Mode

The teaming function allows you to group both available network adapters together to function as a single adapter. The benefit of this approach is that it enables load balancing and failover.

## AMD Socket AM4 Processors for Shuttle DA320 Barebone:

PROCESSOR	MODEL	CORES/ THREADS	CPU CLOCK	TURBO CLOCK	L2 / L3 CACHE	TDP	MEMORY SUPPORT	GPU	Shader	GPU Clock	Displays
Ryzen 5	3400G Pro 3400G	4 / 8	3.7 GHz	4.2 GHz	2 / 4 MB	65 W	DDR4-2933	Vega 11	704	1.4 GHz	3
	2400GE	4 / 8	3.2 GHz	3.8 GHz	2 / 4 MB	35 W	DDR4-2933	Vega 11	704	1.25 GHz	3
	2400G	4 / 8	3.6 GHz	3.9 GHz	2 / 4 MB	65 W	DDR4-2933	Vega 11	704	1.25 GHz	3
Ryzen 3	3200G	4 / 4	3.6 GHz	4.0 GHz	2 / 4 MB	65 W	DDR4-2933	Vega 8	512	1.25 GHz	3
	2200GE	4 / 4	3.2 GHz	3.6 GHz	2 / 4 MB	35 W	DDR4-2933	Vega 8	512	1.1 GHz	3
	2200G	4 / 4	3.5 GHz	3.7 GHz	2 / 4 MB	65 W	DDR4-2933	Vega 8	512	1.1 GHz	3
Athlon	320GE	2 / 4	3.5 GHz	-	1 / 4 MB	35 W	DDR4-2666	Vega 3	192	1.1 GHz	2
	Pro 300GE	2 / 4	3.4 GHz	-	1 / 4 MB	35 W	DDR4-2666	Vega 3	192	1.1 GHz	2
	300GE	2 / 4	3.4 GHz	-	1 / 4 MB	35 W	DDR4-2666	Vega 3	192	1.1 GHz	2
	240GE	2 / 4	3.5 GHz	-	1 / 4 MB	35 W	DDR4-2666	Vega 3	192	1.0 GHz	2
	220GE	2 / 4	3.4 GHz	-	1 / 4 MB	35 W	DDR4-2666	Vega 3	192	1.0 GHz	2
	200GE	2 / 4	3.2 GHz	-	1 / 4 MB	35 W	DDR4-2666	Vega 3	192	1.0 GHz	2

Please refer to the support list for detailed processor support information at [global.shuttle.com](http://global.shuttle.com).