

SYSTEM

XPC slim

POS DS500

Intel Celeron 7305 Processor
8 GB DDR5, 120 GB M.2 SSD (NVMe)



FANLESS
COOLING



5 GB DDR5
RAM



120 GB
M.2 SSDs



HDMI 2.0b



DISPLAY-
PORT 1.4



2.5" HDD/SSD
SUPPORT



DUAL LAN
(2.5G+1G)



VESA MOUNT



WLAN / 4G/5G
OPTIONAL



MAX..
40 °C



REMOTE
POWER OPT.



24/7
SUPPORT

SLIM DESIGN

■ Slim 1.3-litre metal chassis, black ■ Dimensions: 20 x 16.5 x 3.95 cm (LWH) ■ Including Stand and VESA mount (75/100 mm) ■ Supports 24/7 Nonstop Operation ■ Operating temperature: 0~40 °C (non-condensing)

OPERATING SYSTEM

■ An operating system is not included
■ Supports Windows 10/11 (64-bit) and Linux (64-bit)

PROCESSOR

■ Intel Celeron 7305 processor (Intel Core Gen. 12 "Alder Lake-U")
■ Processor cores: 1x P-cores, 4x E-cores, TDP: 15W, Cache: 8 MB
■ Fanless heatpipe cooling system

GRAPHICS

■ Integrated Intel UHD graphics with 48 execution units (EUs)
■ Supports three independent displays

MEMORY

■ 8 GB DDR5-4800 RAM, 262-pin SO-DIMM module

MASS STORAGE

■ Two M.2-2280M slots:
1) equipped with one 120 GB M.2 SSD module (PCIe/NVMe)
2) supports another M.2 SSD card with SATA or 4G/5G-kit (WWN04)
Two thermal pads included
■ M.2-2230E slot supports optional WLAN function
■ One 2.5" bay for SATA hard disk or SSD

CONNECTORS

■ HDMI 2.0b ■ DisplayPort 1.4 ■ VGA ■ 2x audio (line out, mic)
■ 2x USB 3.2 Gen2 (10 Gbps) ■ 4x USB 3.2 Gen1 (5 Gbps) ■ 2x USB 2.0
■ 2x Intel LAN (2.5G + 1G) ■ 1x COM port (1x RS232) ■ Connector for external power button ■ "Always on" Jumper ■ DC-input 12 V or 19 V

POWER SUPPLY

■ External 90W/19V power adapter (also supports 12 V power adapters)

OPTIONAL ACCESSORIES

■ WLAN Module (WLN- M1) ■ 4G/5G-kit (WWN04)
■ Rackmount kit (PRM01) ■ Cable for external power button (CXP01)
■ DIN-Rail mounting kit (DIR01) ■ 2nd COM port RS232 (PCP11)



MODELS OF THE DS50U SERIES

Category	Product	Processor	OS	RAM	M.2 SSD	Bar Code (UPC/EAN)
Barebone	DS50U	Intel Celeron 7305	—	—	—	887993006574
	DS50U3	Intel Core i3-1315U	—	—	—	887993006192
	DS50U5	Intel Core i5-1335U	—	—	—	887993006185
	DS50U7	Intel Core i7-1355U	—	—	—	887993006178
System	POS DS500	Intel Celeron 7305	—	8 GB DDR5	120 GB	4046047104208

Front and Back Panel

Front panel



Back panel



1. 2x USB 3.2 Gen 2 port (red, 10 Gbps)
2. 4x USB 3.2 Gen 1 port (blue, 5 Gbps)
3. LED indicator for power state
4. LED indicator for storage activity
5. Power button
6. Microphone input
7. Headphones output
8. 4-pin connector (2.54 mm pitch) for external power button, Clear CMOS button and 5V DC voltage
9. 2x connector for optional WLAN antenna
10. DisplayPort 1.4
11. HDMI 2.0b port
12. COM port supports RS232/RS422/RS485
13. 2x USB 2.0 port (black)
14. RJ45 1G LAN port (1 Gbps, Intel i219)
15. RJ45 2.5G LAN port (2.5 Gbps, Intel i226)
16. DC-in connector for power adapter Supports 12V and 19V DC
17. D-Sub/VGA port for analog displays
18. 4x perforation for optional 4G/5G antennas (two perforations on both sides)

19. Hole for Kensington Lock (the lock-and-cable is not included)

20. VESA mount (two parts)

Mainboard


Bottom side




Open chassis



View inside

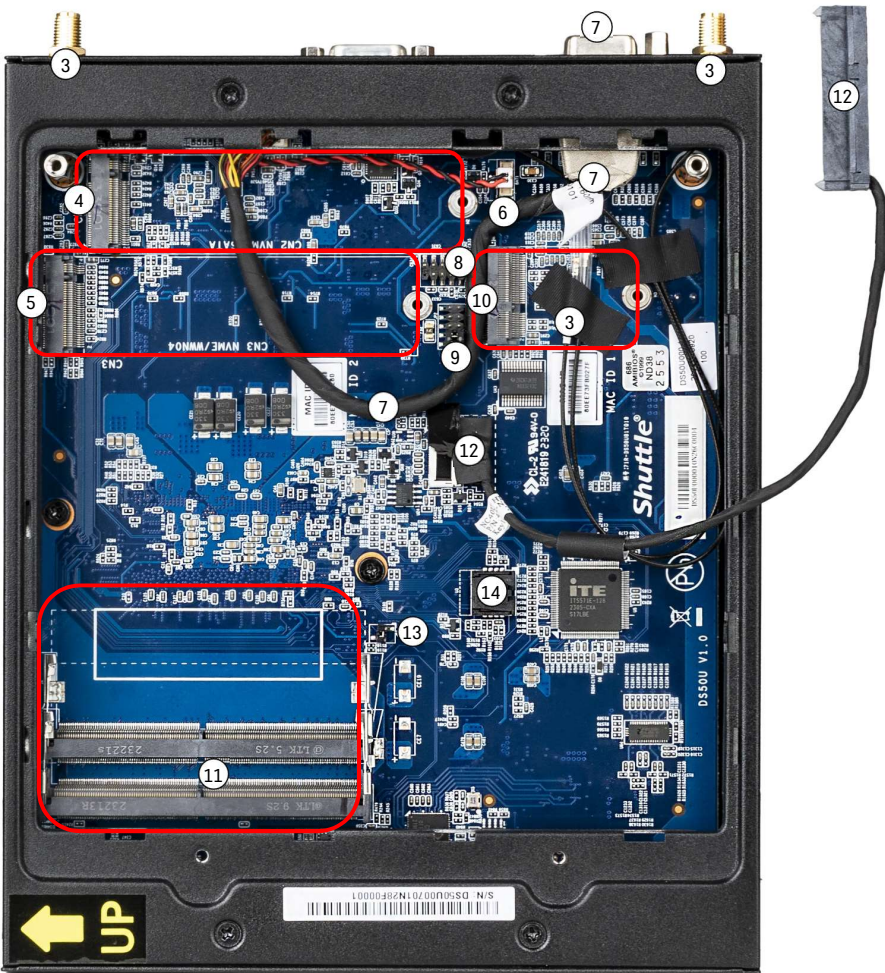

- 1. Bottom chassis cover
- 2. Drive rack for 2.5" hard disk or SSD
- 3. 2x pre-installed WLAN cable for optional antennas and optional WLAN module
- 4. M.2-2280M slot equipped with one 120 GB M.2 SSD card
- 5. M.2-2280M slot supports either one SSD card or a 4G/5G card, which requires the optional WWN04 kit *)
- 6. Connector for the CMOS battery
- 7. D-Sub/VGA port with cable to the onboard connector
- 8. Onboard RS232 COM-Port (2x5-pin header)
- 9. Jumper setting for COM port configuration
- 10. M.2-2230E slot for optional WLAN module
- 11. 2x SO-DIMM memory slot (262-pin) equipped with one DDR5 RAM module
- 12. SATA/power connector for the 2.5" hard disk or SSD
- 13. Always-Power-On jumper (JP9)
- 14. Socket with Flash EPROM for the Firmware

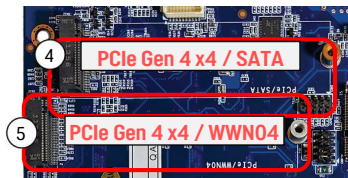

*) Possible configurations for the M.2-2280 slots		
1	2	3
M.2-2280 SSD card (SATA)	M.2-2280 SSD card (PCIe/NVMe)	M.2-2280 SSD card (SATA)
M.2-2280 SSD card (PCIe/NVMe)	WWN04 kit with 4G/5G card (opt.)	WWN04 kit with 4G/5G card (opt.)

SHUTTLE XPC SLIM SYSTEM POS DS500 — SPECIFICATIONS

FANLESS AND SILENT	<p>Passive cooling, no fan noise at all</p> <p>Perfect to be used in noise-sensitive environments</p> <p>Fanless, dust-free and thus virtually maintenance-free</p>
24/7 NONSTOP OPERATION	<p>This device is approved for 24/7 permanent operation.</p> <p>Requirements:</p> <ul style="list-style-type: none"> - Free circulation of air amongst the PC must be guaranteed. - Ventilation holes must stay clear.
CHASSIS	<p>Slim-PC with black steel chassis</p> <p>Without cooling fan, passive cooling only</p> <p>The bay for memory modules, 2.5" drive and M.2 cards can easily be accessed by removing the bottom chassis cover.</p> <p>Dimensions: 200 x 165 x 39.5 mm (LWH) = 1.3 litres</p> <p>Weight: 1.6 kg net and 2.3 kg gross</p> <p>Two holes for Kensington Lock and numerous threaded holes (M3) at both sides of the chassis</p>
OPERATION POSITION	<p>1) Vertical: Usual operating position with the supplied feet (DisplayPort output facing up).</p> <p>2) VESA-mounted: The device can also be mounted behind an appropriate monitor using the supplied VESA mount kit.</p>
OPERATING SYSTEM	<p>This barebone system comes without operating system.</p> <p>It is compatible with Windows 10/11 (64-bit) and Linux (64-bit).</p>
PROCESSOR	<p>Model: Intel Celeron 7305</p> <p>Code name: Alder Lake-U (12th generation Intel Core)</p> <p>Performance-cores (P-Cores): 1 core (1 thread), clock rate: 1.1 GHz</p> <p>Efficient-cores (E-Cores): 4 cores (4 threads), clock rate: 0.9 GHz</p> <p>Smart-Cache (L3): 8 MB</p> <p>Base Power (PL1 TDP): max. 15 W</p> <p>Maximum Tjunction Temperature: 100 °C</p> <p>System-on-a-chip architecture (SoC) with integrated memory and graphics controller</p> <p>BGA1700 package - directly soldered onto the mainboard</p> <p>Lithography: Intel 7 process (10 nm Enhanced SuperFin)</p>
INTEGRATED GRAPHICS	<p>Intel UHD Graphics</p> <p>GPU clock frequency: max. 1100 MHz</p> <p>Execution Units (EUs): 48</p> <p>Supports up to three independent screens:</p> <ol style="list-style-type: none"> 1) DisplayPort 1.4 supports Ultra HD @ 60 Hz 2) HDMI 2.0b supports Ultra HD @ 60 Hz 3) D-Sub/VGA supports analog displays
MAINBOARD / BIOS	<p>Proprietary Mainboard for the Shuttle DS50U series</p> <p>Supports resume after power failure [2]</p> <p>Supports Wake on LAN (WOL)</p> <p>Supports Power on by RTC Alarm</p> <p>Supports boot from M.2 SSD cards und USB devices</p> <p>AMI BIOS in 32 MByte EEPROM with SPI interface</p> <p>Supports hardware monitoring and Watchdog function</p> <p>Supports Unified Extensible Firmware Interface (UEFI)</p> <p>Supports Firmware-TPM (fTPM) Version 2.0</p>
POWER ADAPTER	<p>External 90 W power adapter (fanless)</p> <p>Input: 100~240 V AC, 50/60 Hz, max. 1.6 A</p> <p>Output: 19 V DC, max. 4.74 A, max. 90 W</p> <p>DC cable length: ca. 170 cm</p> <p>AC cable length: ca. 170 cm (3-pin Micky MM C6 and Schuko earthed safety plug)</p>
DC INPUT CONNECTOR	<p>DC Input Connector: 5.5 / 2.5 mm (outer/inner diameter)</p> <p>The DC-input of the computer supports an external power source with either 12V±5% or 19V±5%.</p>
8 GB DDR5 MEMORY	<p>8 GB DDR5-4800 SDRAM-Speicher mit 1,1 V als SO-DIMM-Modul mit 262 Pins</p> <p>Maximal mögliche Gesamtkapazität: 64 GB</p>

2.5" DRIVE BAY	2.5" Drive Bay with SATA connector Supports one Serial ATA hard disk or one SATA SSD drive in 6.35 cm / 2.5" format Device height: max. 9.5 mm Supports Serial-ATA III, 6 Gb/s (600 MB/s) bandwidth Supports Unified Extensible Firmware Interface (UEFI) Note: no Serial ATA cable is required.																		
120 GB M.2 SSD CARD	Equipped with a 120 GB M.2-2280 SSD memory module with PCIe-Interface and NVMe support. This product features two M.2-2280 Key-M slots - it supports M.2 cards with a width of 22 mm and a length of 80 mm (type 2280) - one M.2 SSD card with PCIe/NVMe interface is supported - the second M.2 SSD card must have SATA interface - the second slot can also be used for the optional WWN04 kit to support a 4G/5G wireless network card The following configurations are supported: <table><tr><th>M.2 Slot</th><th>Interface</th><th>Config 1</th><th>Config 2</th><th>Config 3</th></tr><tr><td>Slot 1</td><td>PCIe Gen 4 x4 and SATA 3.0</td><td>M.2 SSD card (SATA)</td><td>M.2 SSD card (PCIe/NVMe)</td><td>M.2 SSD card (SATA)</td></tr><tr><td>Slot 2</td><td>PCIe Gen 4 x4 and USB 3.2 Gen2 *)</td><td>M.2 SSD card (PCIe/NVMe)</td><td>optional WWN04 kit</td><td>optional WWN04 kit</td></tr></table> *) the USB 3.2 interface can only be used with the Shuttle Accessory WWN04 Two thermal pads for the M.2 SSDs are included (size: 70 x 20 mm).				M.2 Slot	Interface	Config 1	Config 2	Config 3	Slot 1	PCIe Gen 4 x4 and SATA 3.0	M.2 SSD card (SATA)	M.2 SSD card (PCIe/NVMe)	M.2 SSD card (SATA)	Slot 2	PCIe Gen 4 x4 and USB 3.2 Gen2 *)	M.2 SSD card (PCIe/NVMe)	optional WWN04 kit	optional WWN04 kit
M.2 Slot	Interface	Config 1	Config 2	Config 3															
Slot 1	PCIe Gen 4 x4 and SATA 3.0	M.2 SSD card (SATA)	M.2 SSD card (PCIe/NVMe)	M.2 SSD card (SATA)															
Slot 2	PCIe Gen 4 x4 and USB 3.2 Gen2 *)	M.2 SSD card (PCIe/NVMe)	optional WWN04 kit	optional WWN04 kit															
M.2-2230E SLOT FOR WLAN CARDS	Slot: M.2-2230 Type E Interfaces: PCI-Express Gen. 3.0 X1 und USB 2.0 Supports M.2 cards with a width of 22 mm and a length of 30 mm (type 2230) Two antenna cable are pre-installed. A WLAN expansion card in M.2-2230 format and two WLAN antennas are required for the WLAN function. Optional Shuttle accessory: WLN-M1																		
AUDIO	Audio Realtek® ALC888S High-Definition Audio Two analog audio connectors (3.5 mm) at the front panel: 1) 2 channel line out (headphones) 2) microphone input Digital multi-channel audio output: via HDMI and DisplayPort																		
DUAL LAN 2.5G AND 1G	Dual network with two RJ45 ports Used network chips: 1) left: Intel i219 Ethernet Controller supports 1.000 / 100 / 10 Mbps operation 2) right: Intel i226 Ethernet Controller supports 2.500 / 1.000 / 100 Mbps operation Supports WAKE ON LAN (WOL) Supports network boot by Preboot eXecution Environment (PXE)																		
FRONT PANEL CONNECTORS	4x USB 3.2 Gen 1 (max. 5 Gbps, blue) 2x USB 3.2 Gen 2 (max. 10 Gbps, red) Microphone input Audio Line-out (headphones) Power button Power LED (blue) HDD LED (yellow)																		
BACK PANEL CONNECTORS	DisplayPort 1.4 [3] HDMI 2.0b D-Sub/VGA 2x USB 2.0 (black) 2x Intel RJ45 LAN (left: 1 Gbps and right: 2.5 Gbps) Serial COM port (5V / 12V, switchable to RS232 / RS422 / RS485) [1] DC-input connector for external power adapter 4-pin connector (2.54 mm pitch) for power button, Clear CMOS and 5 V DC [4] 2x connector for external WLAN antennas																		
ALWAYS-ON JUMPER	By removing Jumper JP1 (please refer to the quick user guide), the system will start unconditionally once power is applied. [2]																		
SUPPLIED ACCESSORIES	Multi-language user guide Two metal feet with four screws M3 x 7 mm VESA mount for 75/100mm standard (two metal brackets) with screws Driver DVD for Windows External 90W power adapter with power cord (with protective-earth contacts)																		

OPTIONAL ACCESSORIES	<p>PCP11: adapter cable for the second COM port (replaces the VGA port)</p> <p>CXP01: adapter cable for external power button</p> <p>WLN-M / WLN-M1: WLAN module (supports WLAN and Bluetooth) with two external antennas and cables</p> <p>PRM01: 2U rack mount front plate for two Shuttle XPC slim</p> <p>DIR01: mounting kit for 35 mm DIN-Rail</p> <p>WWN04: 4G/5G kit with antennas - enables the use of an optional 4G/5G card in M.2 format and a nano SIM card</p>
ENVIRONMENTAL SPECIFICATIONS	<p>Operating temperature range: 0~40 °C [5]</p> <p>Relative humidity, non-condensing: 10~90 %</p>
CONFORMITY & CERTIFICATIONS	<p>EMI: CE, FCC, BSMI, RCM, VCCI</p> <p>Safety: CB, BSMI, cTUVus</p> <p>Other: RoHS, Energy Star, ErP</p> <p>This device is classed as a technical information equipment (ITE) in class B and is intended for use in living room and office.</p> <p>The CE-mark approves the conformity by the EU directives:</p> <p>(1) 2014/30/EU relating to electromagnetic compatibility (EMC)</p> <p>(2) 2014/35/EU relating to Electrical Equipment designed for use within certain voltage limits (LVD)</p> <p>(3) 2009/125/EC relating to eco design requirements for energy-related products (ErP)</p>

Footnote:

[1] Jumper for COM port configuration

Pin 9 of the COM-Port is a multi-functional signal. Based on the Jumper JP2 configuration on the mainboard, it can be configured as Ring Indicator (RI) or external power supply with a voltage level of either 5 V or 12 V. Each COM port can be configured separately. The operating mode of COM 1 can be set to RS232, RS422 or RS485 in the BIOS. The second COM port (COM 2) supports RS232 mode only, and in the standard SKU of this product it is only available as an onboard connector on the mainboard. An appropriate adapter (e.g. the optional accessory PCP11) is required in order to provide this port as D-Sub connector at the back panel. In this case the VGA port cannot be used.

[2] Power on after power fail:

The BIOS setup provides a "Power-On after Power Fail" function that can be found under "Power Management Configuration". This function determines the PC's behaviour after power failure. As a matter of the nature of this function, it may fail after short power failures. This is why this product also comes with a hardware-based solution. By removing Jumper J9 (please refer to the quick user guide), the system will start unconditionally once power is applied.

[3] How to convert DisplayPort into HDMI/DVI

The DisplayPort output can be converted to HDMI or DVI by an additional, passive adapter cable. For example:

DELOCK 82590: 1 m, DisplayPort (male, 20p) to HDMI-A (male, 19p)

DELOCK 82435: 5 m, DisplayPort (male, 20p) to DVI-D (male, 24p)

The integrated graphics automatically detects the connected display and puts out the appropriate electric signal - either through DisplayPort (without an adapter) or HDMI/DVI (with an adapter).

However, a monitor with a DisplayPort connector cannot be connected to the HDMI port with a simple, passive adapter.


[4] Four-pin header at the back panel

This header allows for connecting an external power button.

It also provides 5 V DC voltage for external devices and the Clear CMOS function. Optional accessory: the adapter cable CXP01.

[5] Caution: For ambient temperatures higher than 35 °C we strongly recommend to use an SSD instead of an HDD

SHUTTLE XPC SLIM SYSTEM POS DS500 – Technical Drawing (1)

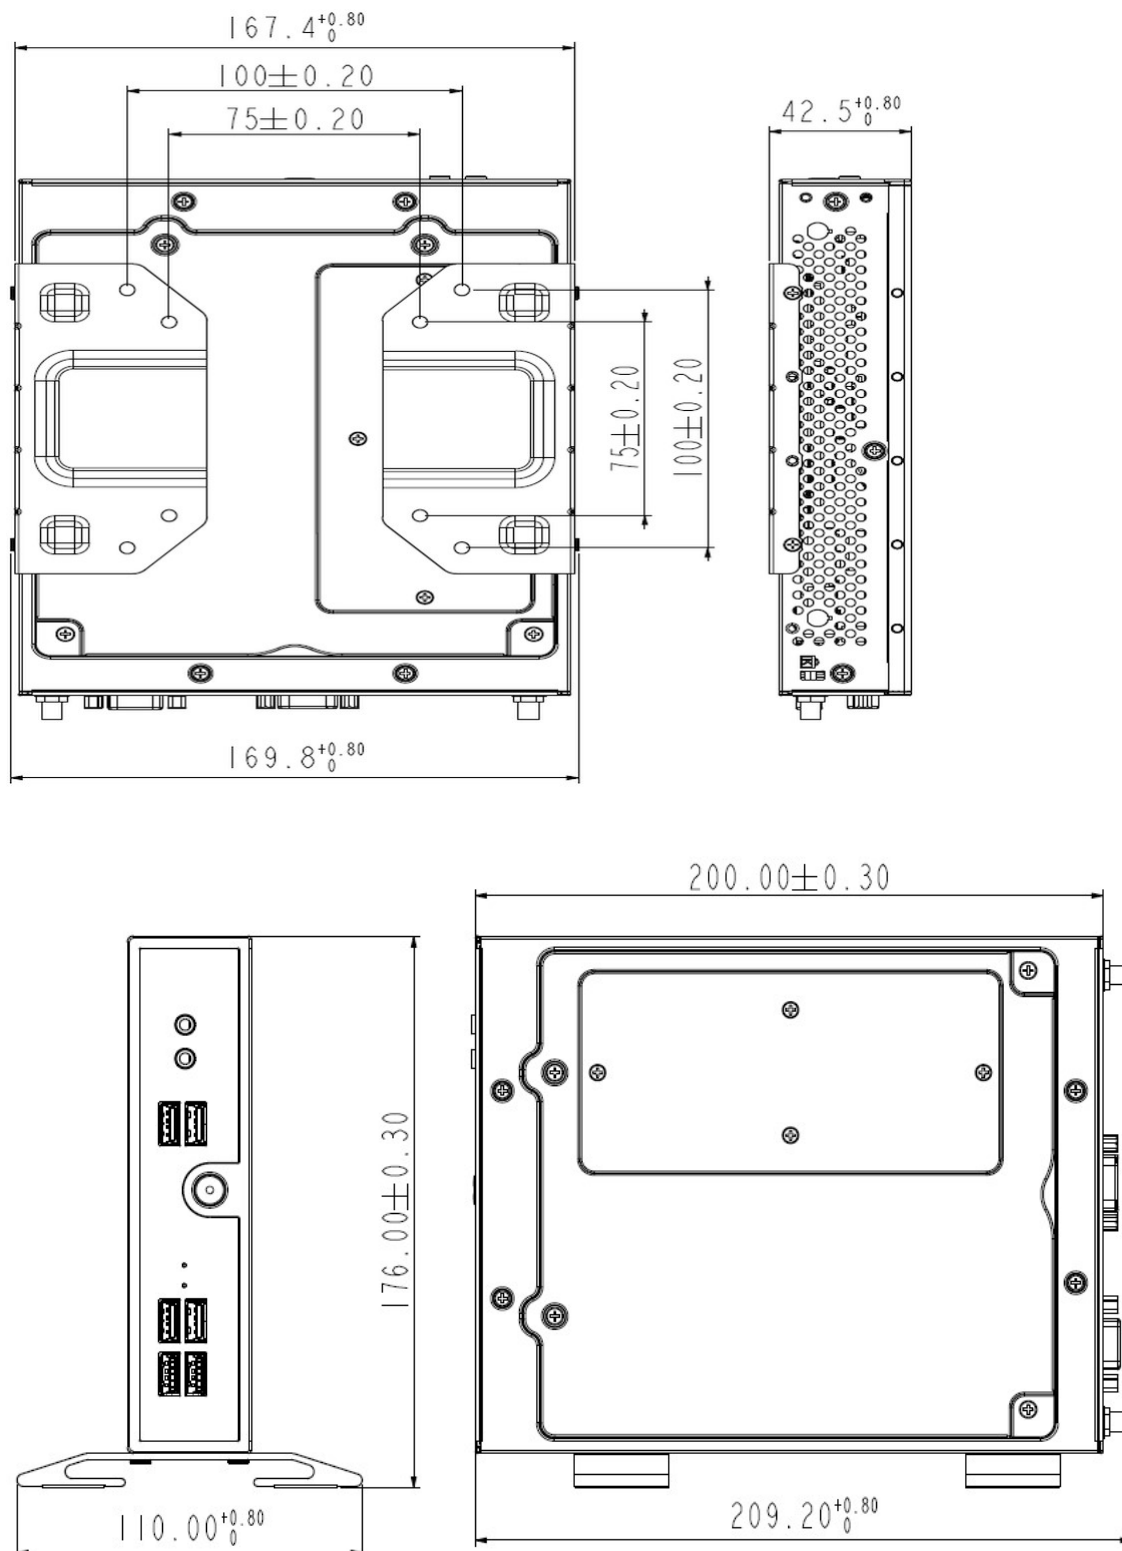

SHUTTLE XPC SLIM SYSTEM POS DS500 – Technical Drawing (2)

